

MODEL CF **Sentinel**

**The All Stainless Steel
Chimney for
Wood Stoves**



SELKIRK
CANADA CORPORATION

FUEL



WOOD



GAS




OIL




COAL

PRODUCT FEATURES



SOLID PACK
INSULATED



STAINLESS STEEL

A proud member and supporter of the following associations:



Why Buy Selkirk Products?

When you install Selkirk products, you do so with confidence. Selkirk has a long history as the industry's leading manufacturer of Chimney & Venting products. Our reputation for quality, service and customer support help make Selkirk your #1 choice.

History

Selkirk invented the factory-built chimney in 1933 and has maintained its Leadership position in the industry ever since, through development of quality and innovative products.

Strength

As the largest manufacturer of chimney & venting products in Canada, Selkirk continues to expand its business and currently operates three Canadian manufacturing facilities. A multi-line, multi-channel approach to the market allows Selkirk to leverage its size into strengths such as continual product development, manufacturing advancements and technology.

Quality Guarantee

All Selkirk products feature premium materials and superior design, resulting in the very best end-product in your home. Products are designed to exceed, not merely meet, the most stringent ULC safety standards - your guarantee of safety. Each of these products are backed by a manufacturers limited Lifetime Warranty - your guarantee of quality.

Commitment

Selkirk adheres to the strictest standards in all aspects of business. A mandate of continuous improvement in all functional areas means you can rely on Selkirk for all your Chimney & Venting needs.

Selkirk University

Selkirk University opened its doors in 2007 and has provided its students with the Product Knowledge needed for a competitive edge. You can now develop the skills needed to excel in today's marketplace with free Online Training at Selkirk University and multiple resources at Selkirk's website.

HISTORY of SELKIRK and The SENTINEL CHIMNEY

- 1933** In Selkirk, Manitoba, Kelly Sveinson invents the first insulated prefabricated chimney, using a metal Coca-Cola sign for raw material. Selkirk Metal Products begins manufacturing chimney and gas vent in Winnipeg, Manitoba.
- 1950** Due primarily to the availability of natural gas in Ontario, Selkirk Metal Products moves to Brockville, Ontario.
- 1957** Selkirk introduces "rock wool" insulated chimney for solid fuel appliances.
- 1960** An American company, purchases Selkirk Metal Products, creating the Selkirk name.
- 1964** Selkirk Canada, Inc. became a wholly owned subsidiary.
- 1980** Selkirk Canada opens its new manufacturing facility on California Avenue in Brockville, Ontario.
- 1982** Selkirk introduces Model CF/Sentinel Chimney to the Canadian market. This new design represents a new standard in safety for Wood Stove Chimney in Canada.
- 2000** Selkirk introduces its Internet Web Site @ www.selkirkcanada.com.
- 2002** Sentinel On-Line Installation Planner is introduced, allowing users to easily design a chimney system over the Internet.
- 2004** Sentinel Interactive Installation Guide is developed to aid in training and education of the installation process.
- 2007** Selkirk celebrates the 25th anniversary of Sentinel Chimney.
- 2009** Selkirk develops an Online Product Selector as the latest addition to its' expanding menu of Online Tools
- 2009** As part of our continuous improvement program we have added a new precision laser butt-welding machine to our Model CF Sentinel insulated chimney pipe manufacturing process.

SENTINEL Wood Appliance Chimney

The "Peace of Mind" Chimney System

Selkirk leads the way with a safer chimney for wood burning appliances. Model CF Sentinel takes the worry out of chimney fires with unique design features engineered into the product for added safety and performance.

Sentinel's unique design combines 2 different alloys of stainless steel, for inner and outer pipes, with more than 2 inches of premium fibre insulation. When installed, Sentinel's unique Web Coupler allows the insulation to form a continuous column of protection from one chimney length to the next. This minimizes hot spots and leakage at the joints. Selkirk's Sentinel chimney contains more insulation than other chimney brands for superior insulating value and fire protection. More insulation = better insulating value. Better insulating value helps keep stack temperatures high, enhancing "draw" and reducing condensation and creosote build-up (the most common cause of chimney fires).

The Stainless Steel Inner Liner and Outer Casing of Sentinel are welded along the seam for added strength and to resist moisture penetration. Sentinel Chimney is secured at each joint by a Locking Band, which is supplied with each insulated Length, Tee and Elbow. Some other chimney systems may use screws to secure chimney lengths - this is often the point of rust, corrosion or moisture penetration.

General Specifications for Model CF Sentinel Chimney

Model CF factory-built chimney has been laboratory tested & listed by Underwriter's Laboratories of Canada for use up to 2100°F (1150°C) with gas, oil and solid fuel-fired residential and building heating appliances in accordance with Standard CAN4-S629-M84.

Temperatures used in this standard are:

Normal Firing: 1200°F (650°C) continuous firing

Over Firing: 1700°F (925°C) for duration of 60 minutes

Creosote Burn Out: 2100°F (1150°C) for three firings x 30 minutes each

Model CF Sentinel chimney (6", 7" and 8" inner diameter sizes) may be used for gas, oil (some coal) and all wood fired residential appliances including cooking ranges, heating stoves, fireplaces, central furnaces, floor furnaces, steam and hot water boilers, recessed heaters, unit heaters and water heaters. Model CF may also be used for masonry fireplaces and domestic type incinerators.

Sentinel's supports are capable of supporting four times the combined weight of the chimney installation, at the maximum height given for the specific support.

Chimneys passing through occupied portions of the building must be enclosed in combustible material with a 2" air space clearance maintained. Such enclosures must be firestopped at every floor penetration with Model CF parts designed for this purpose.

Framing and Support Table

Sentinel Chimney Model CF	Dimensional Data (inches)		
Size, inches, inside	6	7	8
Outside diameter	10.5	11.75	13.0
Enclosure and framing	14.5 x 14.5	15.75 x 15.75	17.0 x 17.0
Ceiling support framing*	14.5 x 14.5	14.5 x 14.5	14.5 x 14.5
Approx. weight, lbs./ft.	8	9	10.5
Maximum Height For All Supporting Methods (Feet)			
Ceiling Support Package (CSP)	40	40	40
Cathedral Box	15	15	15
Interior Resupport Assembly/ Offset Support (ISA/OS)	30	30	30
Wall Support Package (WSP)	40	40	40
**Roof Support (RSP)	50	50	50
Anchor Plate (AP)	85	85	85
Minimum Clearance To Combustibles		2 inches Minimum All Sizes	

* The clearance to combustibles obtained with a correctly installed Ceiling Support Assembly in the framed opening specified has been tested. The 2" clearance does not apply at this location.

**Note: Twenty (20) feet of chimney may be suspended below a Roof Support using a Locking Band and screws at each joint.

Sentinel Chimney Features & Benefits


Selkirk invented pre-fabricated chimney in the 1930's, & has proudly manufactured Model CF Sentinel chimney in Brockville, Ontario since 1982. When purchasing a Wood Stove Chimney you should consider the following facts to see how Selkirk stacks up to the competition.

Web Coupler: Allows for expansion of the inner and outer pipes without fear of buckling in the event of a chimney fire. It also significantly reduces the possibility of heat transfer at the joint.

Free-floating Inner Liner: Allows the inner liner to expand under extreme temperatures. Enables Sentinel to contain chimney fires without buckling.

Spring-Clip Locking Band: Included with each insulated length, tee and elbow, engages quickly, using simple thumb pressure to positively lock together each of the components. No tools required.

Our **continuous - welded seams** give the Sentinel Chimney exceptional strength while eliminating moisture penetration into the insulation.

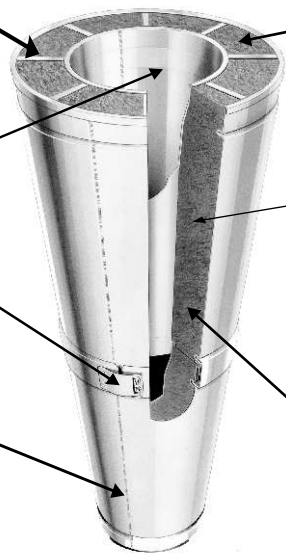

Insulation-to-Insulation Contact Creates a continuous column of protection which eliminates cold air infiltration at every chimney joint. This feature significantly reduces the formation of creosote and therefore the potential for chimney fires.

Size Matters! More insulation = better insulating value. Sentinel chimneys contain more than two inches of premium fibre insulation for superior insulating value and fire protection. Some competitors will claim to meet the stringent Canadian 2100° standard with less insulation. Sentinel will not only meet, but exceed the 2100° standard by a wide margin over the competition.

Solid-Pack Insulation: Provides maximum safety and performance. Sentinel's unique solid-pack design helps keep flue temperatures high (performance) and outer temperatures low (safety).




THE BEST WARRANTY IN THE INDUSTRY
Sentinel Chimney (Model CF) features an advanced engineering design and premium material which allows Selkirk Canada, Inc. to offer a Lifetime Warranty, even in the event of chimney fires.


Stainless Steel Chimney Lengths

HEIGHT REQUIREMENTS

The chimney must extend at least three feet above the highest point where it passes through the roof surface and at least two feet higher than any part of the building within a horizontal distance of ten feet.

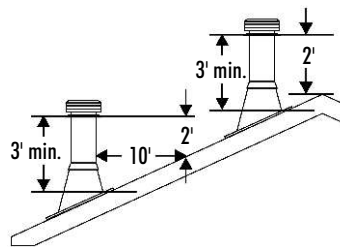


Chimney Sections

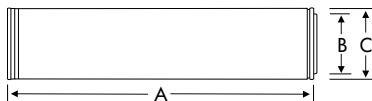

- Each length includes a Spring-Clip Locking Band.
- Sectional overlap of 1".
- Chimneys are sized according to the inner diameter and are available in 6", 7" and 8".
- Chimney sections are available in 36", 24", 18", 12", and 9" lengths.

Size	Dimensions			Part Number	Pack
	A	B	C		
6" x 36"	36"	6"	10-1/2"	6CF-36	1
6" x 24"	24"	6"	10-1/2"	6CF-24	1
6" x 18"	18"	6"	10-1/2"	6CF-18	1
6" x 12"	12"	6"	10-1/2"	6CF-12	1
6" x 9"	9"	6"	10-1/2"	6CF-9	1
7" x 36"	36"	7"	11-3/4"	7CF-36	1
7" x 24"	24"	7"	11-3/4"	7CF-24	1
7" x 18"	18"	7"	11-3/4"	7CF-18	1
7" x 12"	12"	7"	11-3/4"	7CF-12	1
7" x 9"	9"	7"	11-3/4"	7CF-9	1
8" x 36"	36"	8"	13	8CF-36	1
8" x 24"	24"	8"	13	8CF-24	1
8" x 18"	18"	8"	13	8CF-18	1
8" x 12"	12"	8"	13	8CF-12	1
8" x 9"	9"	8"	13	8CF-9	1

LOCKING BANDS




- All Stainless Steel construction.
- Spring-Clip locking mechanism.
- Only requires simple thumb pressure to positively lock into place - No tools required.

Size	Dimensions		Part Number	Pack
	A	B		
6"	10-1/2"	1-1/4"	6CF-LB(SS)	4
7"	11-3/4"	1-1/4"	7CF-LB(SS)	4
8"	13"	1-1/4"	8CF-LB(SS)	4

Stainless Steel Elbows & Tees

CHIMNEY OFFSET CHARTS

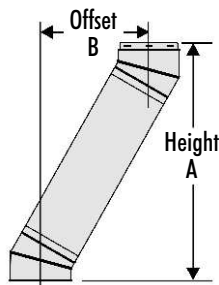

One pair of Elbows can be used to provide a sloped offset of 15° or 30°. An offset data table is supplied to determine the offset desired and the offset height.


Elbow	Length	6" Diameter		7" Diameter		8" Diameter	
		A	B	A	B	A	B
2 x 15°	9"	18-1/2"	3-3/4"	18-7/8"	3-5/8"	19-1/4"	3-5/8"
2 x 15°	12"	20-3/8"	4-1/2"	20-3/4"	4-1/8"	20-7/8"	4-1/8"
2 x 15°	18"	26-1/8"	5-5/8"	26-1/2"	5-3/4"	26-3/4"	5-3/4"
2 x 15°	24"	32"	7-1/8"	32-5/8"	7-1/8"	32-3/4"	8"
2 x 15°	36"	43-7/8"	10-3/8"	44-1/8"	10-1/2"	44-1/2"	10-1/2"
2 x 30°	9"	20"	7-3/4"	20-1/2"	8"	21-3/16"	8-1/8"
2 x 30°	12"	21-1/2"	8-5/8"	22-1/4"	8-7/8"	22-3/4"	9"
2 x 30°	18"	26-3/4"	11-3/4"	27-3/8"	11-7/8"	28"	12"
2 x 30°	24"	31-7/8"	14-3/8"	33"	15-1/4"	34-1/4"	14-1/2"
2 x 30°	36"	42-5/8"	20-7/8"	43-3/16"	21"	43-7/8"	21-1/4"

The vertical run of chimney above an offset must be supported using an Interior Resupport Assembly securely clamped to the pipe just above a Locking Band, with its straps nailed to a nearby structure.

INSULATED 15° AND 30° ELBOWS


- The insulated elbow is used when an offset is required.
- Locking Bands must be used on all elbows.
- A maximum of 6 feet is allowable between offsets.
- Elbow is fully insulated and can be used at the same 2" clearance as chimney lengths.
- Elbow support must be used with all offset installations.
- Elbows can be rotated to attain optimum positioning offset, and allow chimney to return to correct vertical alignment, prior to installing Locking Bands.
- Each Elbow Kit consists of two Elbows, two Locking Bands and one Interior Resupport Assembly.

15° ELBOW KIT




Size	Dimensions			Part Number	Pack
	A	B	C		
15° - 6"	6"	10-1/2"	19-3/8"	6CF-EL15K	1
15° - 7"	7"	11-3/4"	20"	7CF-EL15K	1
15° - 8"	8"	13"	20-5/8"	8CF-EL15K	1

30° ELBOW KIT



Size	Dimensions			Part Number	Pack
	A	B	C		
30° - 6"	6"	10-1/2"	12-1/4"	6CF-EL30K	1
30° - 7"	7"	11-3/4"	12-7/8"	7CF-EL30K	1
30° - 8"	8"	13"	13-1/2"	8CF-EL30K	1


INSULATED TEE



- The Insulated Tee is used for a through-the-wall installation using a Wall Support Package.
- A chimney length is attached to the tee branch using a Locking Band to pass safely through a wall.
- Maximum height of chimney supported by the Insulated Tee fixed to a Wall Support is 40'.
- Each Tee includes an Insulated Tee Plug.

Size	Dimensions			Part Number	Pack
	A	B	C		
6"	7-5/8"	7-5/8"	15-1/2"	6CF-IT	1
7"	8-1/4"	8-1/4"	16-3/4"	7CF-IT	1
8"	8-7/8"	8-7/8"	18"	8CF-IT	1

INSULATED TEE PLUG




- The Insulated Tee Plug is used to seal the base of an Insulated Tee.
- The Tee Plug is easily removed for chimney maintenance or inspection.
- Insulated to maintain flue gas temperatures.

Size	Dimensions			Part Number	Pack
	A	B	C		
6"	6-3/8"	2"	5-15/16"	6CF-ITP	4
7"	7-3/8"	2"	6-15/16"	7CF-ITP	4
8"	8-3/8"	2"	7-15/16"	8CF-ITP	4

Supports


WALL SUPPORT PACKAGE

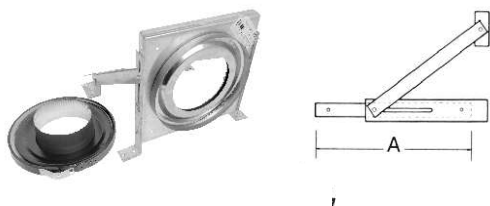

- Used to support the chimney on a through-the-wall installation.
- Will support up to 40 feet of chimney.
- Includes base plate, wall bracket, angle bracing, hardware and a black smoke pipe adapter.

Size	Dimensions	Part Number	Pack
	A		
6"	11-7/8"	6CF-WSP	1
7"	12-3/4"	7CF-WSP	1
8"	14-3/8"	8CF-WSP	1

CEILING SUPPORT PACKAGE

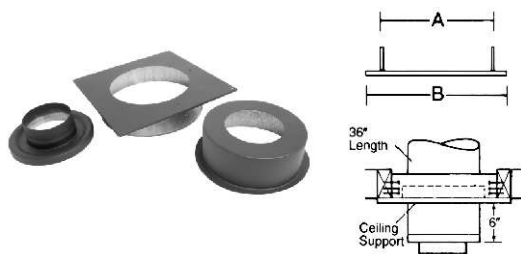

- Used to support the chimney from a flat ceiling.
- Will support up to 40 feet of chimney.
- Decorative matte black finish.
- Includes Ceiling Support and a two piece Smoke Pipe Adapter.

Size	Dimensions	Part Number	Pack
	A		
6"	14-1/4"	6CF-CBSP	1
7"	14-1/4"	7CF-CBSP	1
8"	14-1/4"	8CF-CBSP	1

ROOF SUPPORT PACKAGE



NOTE: Chimney Length not included.

- The roof support may be used on a floor, ceiling or roof and adjusts to any roof pitch.
- It may be used above an offset to support the offset or as a supplementary support when the chimney height exceeds that of the primary support.
- The Roof Support will support a total height of 30 feet of chimney, 20 feet of which can be suspended beneath it.

Size	Part Number	Pack
Universal	URSP	1

ANCHOR PLATE



- Provides a secure attachment for the Sentinel Chimney to a "Listed" appliance certified for use with Sentinel, or masonry fireplace.
- Includes Flue Extension and Base Plate.
- Supports up to 85' of chimney.

Size	Dimensions	Part Number	Pack
	A		
6"	11-7/8"	6CF-AP	1
7"	12-3/4"	7CF-AP	1
8"	14-3/8"	8CF-AP	1

SUSI - UNIVERSAL SHIELDING INSULATION



- The SUSI protects building materials against radiant heat from the chimney and helps maintain temperatures within the chimney system. The SUSI also reduces air infiltration into the house.

Size	Dimensions	Part Number	Pack
Universal		0522908	1

RUBBER BOOT FLASHING KIT




- Used for installations on corrugated roofs with pitches flat to 12/12 except for 8" Chimney where 10/12 is max. pitch
- Kits include rubber boot, spacer kit, special storm collar and mounting hardware

Size	Dimensions	Part Number	Pack
6" to 8"	26-3/4" x 26-3/4"	051275	1

Shields

ATTIC INSULATION SHIELD/FIRESTOP

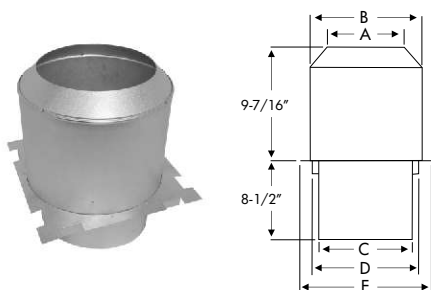


The AIS allows for a depth of 10" of insulation plus the depth of the ceiling

- The AIS must be installed where the chimney enters the attic space in a ceiling supported (interior) installation.
- Designed to keep insulation away from the chimney, and to maintain the mandatory 2" clearance to combustibles.
- One piece, round design

Size	Dimensions					Part Number	Pack
	A	B	C	D	E		
6"	10-5/8"	14-1/4"	12-1/4"	14-1/4"	17"	6CF-AIS	1
7"	11-7/8"	15-1/2"	13-1/2"	15-1/2"	18-1/4"	7CF-AIS	1
8"	13"	16-3/4"	14-3/4"	16-3/4"	19-1/2"	8CF-AIS	1


INSULATED WALL THIMBLE

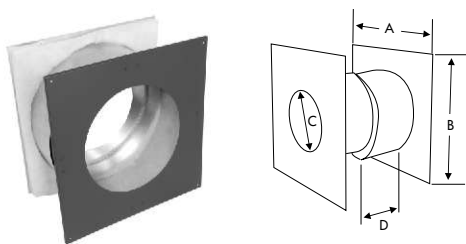

- May be used in a through-the-wall installation, in place of a Wall Plate and Exterior Wall Plate.
- Radiation Shield is included with spacers which maintain the mandatory 2" clearance to combustibles.
- Decorative matte black finish eliminates the need to frame the opening in wall.
- Insulated to prevent cold air infiltration.

Size	Dimensions				Part Number	Pack
	A	B	C	D		
6"	16-1/2"	16-1/2"	10-5/8"	6-1/2"	6CF-IWT	1
7"	17-3/4"	17-3/4"	11-7/8"	6-1/2"	7CF-IWT	1
8"	19"	19"	13-1/8"	6-1/2"	8CF-IWT	1


EXTERIOR WALL PLATE

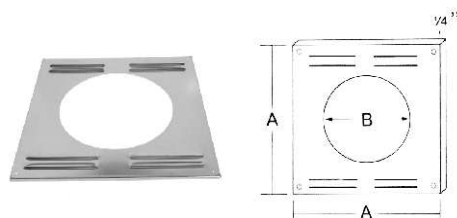

- Used to centre a Tee extension when installing through a combustible framed wall.
- Has louvers to provide ventilation and protection in the area through which the chimney extends.

Size	Dimensions		Part Number	Pack
	A	B		
6"	16-1/2"	10-5/8"	6CF-EWP	4
7"	17-3/4"	11-7/8"	7CF-EWP	4
8"	19"	13-1/8"	8CF-EWP	4


INSULATED WALL PLATE SPACER

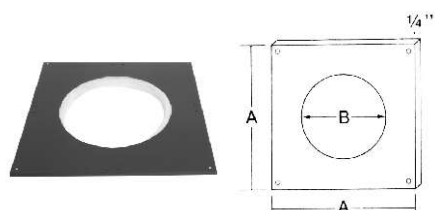

- Used to centre a Tee extension when installing through a combustible framed wall.
- Decorative matte black finish.
- Insulated to prevent cold air infiltration.

Size	Dimensions		Part Number	Pack
	A	B		
6"	16-1/2"	10-5/8"	6CF-WPS	1
7"	17-3/4"	11-7/8"	7CF-WPS	1
8"	19"	13-1/8"	8CF-WPS	1

FIRESTOP JOIST SHIELD (for intermediate floors)

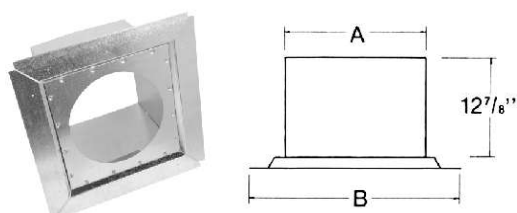


- Required where the chimney passes from a lower living space into an upper living space.
- Maintains the mandatory 2" clearance to combustibles.

Size	Dimensions		Part Number	Pack
	A	B		
6"	12"	19-1/4"	6CF-JS	1
7"	13-1/4"	20-1/2"	7CF-JS	1
8"	14-1/2"	21-3/4"	8CF-JS	1


Flashings and Storm Collars

ROOF FLASHING SELECTION CHART

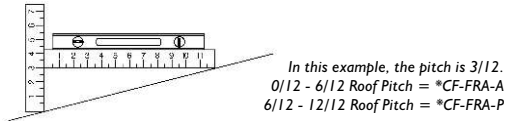

To determine what roof flashing you'll require, you must work out the pitch of your roof. To determine the pitch, you'll need two rulers and a level. Measure the number of inches from the end of the level down to the roof.


ADJUSTABLE ROOF FLASHING-FLAT TO 6/12 PITCH



- Used where the chimney passes through a roof with a pitch of Flat to 6/12.
- Comes complete with storm collar.

Size	Dimensions			Part Number	Pack
	A	B	C		
6"	12-1/2"	21"		6CF-FRA-A	4
7"	13-3/4"	21"		7CF-FRA-A	4
8"	15"	21"		8CF-FRA-A	4


ADJUSTABLE ROOF FLASHING ASSEMBLY- 7/12 to 12/12 PITCH



- Used where the chimney passes through a roof with a pitch of 7/12 to 12/12.
- Comes complete with storm collar.

Size	Dimensions			Part Number	Pack
	A	B	C		
6"	11 3/4"	20 1/2"		6CF-FRA-P	4
7"	13"	22 1/4"		7CF-FRA-P	4
8"	14 1/4"	24"		8CF-FRA-P	2

STORM COLLAR




- Used in conjunction with roof flashing to weather proof the system.

Size	Dimensions			Product Code	Pack
	A	B	C		
6"	10-1/2"	16-1/2"	4-5/8"	6CF-SC	4
7"	11-1/2"	17-3/4"	4-5/8"	7CF-SC	4
8"	13"	19-3/4"	4-5/8"	8CF-SC	4

Rain Caps

ROUND TOP - STAINLESS STEEL



- Advanced design, premium quality stainless steel.
- Prevents rain, snow, leaves or animals from entering the chimney.
- Can be used in conjunction with a Spark Arrestor

Size	Dimensions			Part Number	Pack
	A	B	C		
6"	10-1/2"	12"	5-1/2"	6CF-SRT	1
7"	11-3/4"	14"	6-1/4"	7CF-SRT	1
8"	13"	16"	7"	8CF-SRT	1

SPARK ARRESTER




- Stainless steel mesh wire fits our Round Tops (*CF-SRT).

Size	Dimensions	Part Number	Pack
6"	12" x 6"	6T-USA	4
7"	14" x 6"	7T-USA	4
8"	16" x 6"	8T-USA	4

Parts and Accessories


INSULATED FINISHED CEILING PLATE

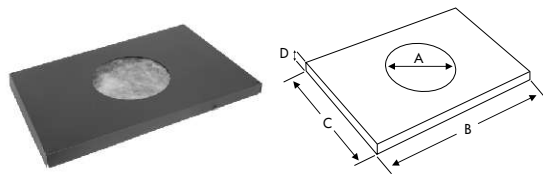

- Used with Roof Support in a Cathedral Ceiling Installation.
- Matte black finish.
- Adjusts to multiple roof pitches.
- Covers 2" space around chimney for attractive finish.
- Insulated to prevent cold air infiltration.
- Universal design for 6", 7" and 8" sizes.

Size	Dimensions				Part Number	Pack
	A	B	C	D		
Universal	9-15/16"	29"	19"	1-15/16"	7CF-FCP	


CLEANOUT TEE

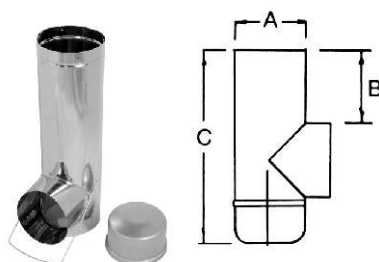

- Always situated in a room with heating appliance.
- Cap on bottom can be removed for easy cleaning.
- Stainless steel construction.

Size	Dimensions			Part Number	Pack
	A	B	C		
6"	6"	13-1/2"	24"	6CF-CA	4
7"	7"	13-1/2"	25"	7CF-CA	4
8"	8"	13-1/2"	26"	8CF-CA	4


STARTER TEE

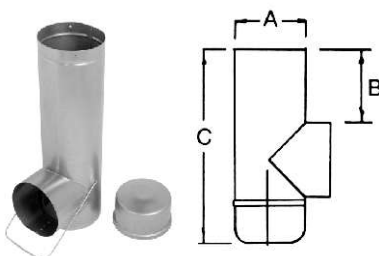

- Always situated in a room with heating appliance.
- Cap on bottom can be removed for easy cleaning.
- Galvanized steel construction.

Size	Dimensions			Part Number	Pack
	A	B	C		
6"	6"	13-1/2"	24"	6CF-ST	4
7"	7"	13-1/2"	25"	7CF-ST	4
8"	8"	13-1/2"	26"	8CF-ST	4


WALL BAND

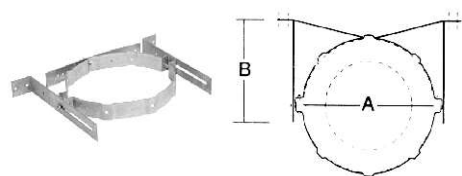

- Steel construction.
- Provides lateral support for the chimney when installed adjacent to a wall.
- Maintains the mandatory 2" clearance to combustibles.
- Used 3 feet above the Wall Support, then every 8 feet thereafter.

Size	Dimensions		Part Number	Pack
	A	B		
6"	10-1/2"	11-1/4"	6CF-WB	4
7"	11-3/4"	11-1/4"	7CF-WB	4
8"	13"	11-1/4"	8CF-WB	4

DECORATOR SLEEVE

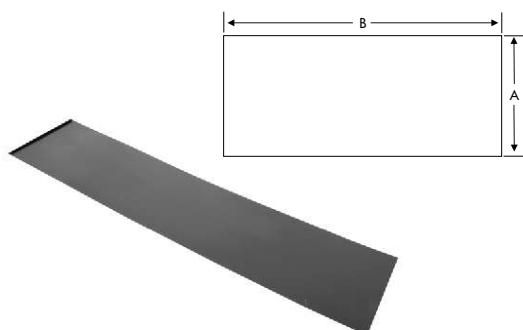


- Matte black finish provides decorative finish to stainless steel components within the room.
- 8" wide, and may be trimmed to size.

Size	Dimensions		Product Code	Pack
	A	B		
6"	8"	33-1/2"	6CF-DS8	4
7"	8"	37-1/2"	7CF-DS8	4
8"	8"	41-3/8"	8CF-DS8	4

Parts & Accessories Continued


SMOKE PIPE ADAPTER



- For a transition from black stove pipe to Sentinel chimney.
- Twist-lock for easy connection.
- Connects to both single and double wall connector pipe.

Size	Dimensions				Part Number	Pack
	A	B	C	D		
6"	6"	5-7/8"	7/8"	10-3/8"	6CF-SPA	1
7"	7"	6-7/8"	7/8"	11-5/8"	7CF-SPA	1
8"	8"	7-7/8"	7/8"	12-7/8"	8CF-SPA	1

ROOF BRACE KIT



- Use one Roof Brace for every 5' of chimney above roof.
(eg. 10' of chimney above roof = 2 x URBK)
- The kit includes two 5 foot rods and an adjustable band.
- Each rod extends to approximately 10 feet.
- The adjustable band will fit 6" to 8" size chimney.

Size	Dimensions	Product Code	Pack
Universal		URBK	1

Support Kits Selkirk has put together 3 chimney kits to get your project done . . .

Selkirk has taken the guess work out of chimney installation by putting the most common parts for each installation all in one box. These 3 kits depict the most common installations. Simply decide which of these scenarios fits your need, then pick up your chimney lengths, roof flashing and elbows (if required).


CEILING SUPPORT KIT

When your chimney goes up through a ceiling, then thru the roof, you may choose the CEILING SUPPORT INSTALLATION KIT - *CF-CSK

- Stainless Round Top
- Attic Insulation Shield
- Ceiling Support Package (complete with Smoke Pipe Adaptor)

. . . Now you just need your roof flashing and chimney lengths.

SIZE	PRODUCT CODE
6"	6CF-CSK
7"	7CF-CSK

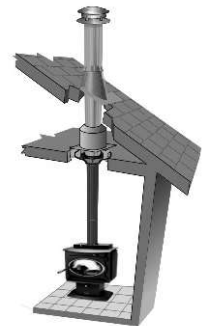

Cathedral Ceiling Support Kit

When your chimney goes out a cathedral or open beam ceiling, you may choose the CATHEDRAL CEILING SUPPORT INSTALLATION KIT - *CF-CCSK

- Stainless Round Top
- Cathedral Ceiling Support Box
- Support Band
- 4 Ceiling Trim Angles
- Smoke Pipe Adapter
- Decorator Sleeve

. . . Now you just need your roof flashing and chimney lengths

SIZE	PRODUCT CODE
6"	6CF-CCSK
7"	7CF-CCSK
8"	8CF-CCSK



Wall Support Kit

When your chimney goes out a wall and then runs straight up, you'll need the WALL SUPPORT INSTALLATION KIT - CF-WSK

- Stainless Round Top
- Wall Band
- Decorator Sleeve
- Insulated Wall Thimble
- Insulated Tee with Plug
- Wall Support Package

. . . Now you just need: Vertical Chimney lengths & a Through-the-Wall length (must extend at least 3" into the room)

SIZE	PRODUCT CODE
6"	6CF-WSK
7"	7CF-WSK



Limited Lifetime Warranty

MODEL CF / Sentinel 2100 Degree Chimney

Selkirk Corporation, ("Selkirk", "we", "us", "our") warrants Model CF Sentinel products to be free from defects in material and workmanship. For products installed after January 1, 2009, for a period of Ten (10) years from original installation, we will provide replacement product with a similar or like quality of available Selkirk product, **free of charge** excluding any installation costs. From the Eleventh (11) through Fifteenth (15) years we will provide replacement product at a cost of 75% off the published Retail Price in effect on the date the claim is received excluding any installation costs. At expiration of the Fifteen (15) year term, we will provide replacement product at a cost of 50% off the published Retail Price in effect on the date the claim is received excluding any installation costs. This warranty coverage is non-transferable and applies exclusively to the original consumer.



PROFESSIONAL INSTALLATIONS:

If installation is performed by Professional Installers certified in Canada by WETT or L'APC, we will provide replacement product with a similar or like quality of available product, free of charge (excluding any installation costs) for the full Fifteen (15) years from the date of original installation. To be eligible for this additional warranty the consumer must provide a proof of installation by a Professional Installer when submitting a claim.

LIMITATIONS:

BUYER'S REMEDY ARE LIMITED TO REPAIR OR REPLACEMENT OF THE PRODUCT AND DO NOT INCLUDE INSTALLATION COSTS. EXCEPT AS SET FORTH HEREIN, ALL OTHER WARRANTIES (EXPRESS OR IMPLIED), INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE HEREBY DISCLAIMED. IT IS AGREED THAT THIS SHALL BE THE SOLE AND EXCLUSIVE REMEDY OF THE BUYER. IN NO EVENT SHALL WE BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL OR PUNITIVE DAMAGES ARISING DIRECTLY OR INDIRECTLY FROM THE USE OF THE PRODUCTS WHETHER BASED ON WARRANTY, CONTRACT NEGLIGENCE OR STRICT LIABILITY.

ALL LENGTHS, TEES, ELBOWS, AND COMPONENTS SUPPLIED BY US ARE SUBJECT TO WARRANTY COVERAGE. PRODUCT SUPPLIED BY US AS REPLACEMENT FOR ORIGINAL MATERIAL WILL BE SUBJECT TO A ONE-YEAR WARRANTY COVERAGE.

WARNING: FAILURE TO INSTALL SELKIRK PRODUCTS ACCORDING TO THE MANUFACTURER'S INSTRUCTIONS WILL VOID ALL APPLICABLE WARRANTIES AND MAY RESULT IN FIRE, CARBON MONOXIDE POISONING OR DEATH. SEE OUR SELKIRK INSTALLATION INSTRUCTIONS FOR COMPLETE INSTALLATION PROCEDURES.

WARRANTY COVERAGE (with the exception stated below under "This Warranty Does Not Cover"):

All Insulated parts are covered from damage resulting from Chimney Fires.

This warranty covers any substantial defects in material and workmanship in normal use that are found to exist in any of the insulated chimney sections or component parts of your chimney.

THIS WARRANTY DOES NOT COVER:

- (a) any non-stainless base tee unit mounted or connected to an Insulated Chimney system;
- (b) costs (labor or otherwise **) associated with either removing a previously installed product, installing a replacement product, transportation or return of a product, or transportation of replacement product;
- (c) damage to the finish of products caused by the use of improper solvents/chemicals or improper (or lack of) cleaning methods;
- (d) damage resulting from normal wear and tear or failure to reasonably clean, care for or maintain products in accordance with our installation instructions/recommendations;
- (e) damage (to products, appliances or structure) based on or resulting from improper installation or repair, misuse or abuse (including, but not limited to, excessive or improper operating condition), or alteration or adjustment other than in conformity with our installation instructions and specifications, whether performed by a contractor, service company, technician, or yourself;
- (f) any products that have been moved from their original installation site.
- (g) damage caused by burning driftwood, garbage, or any other prohibitive material that has been burned in the appliance served by the chimney
- (h) damage that results from accidents such as fire, flood, high winds, "acts of God", or any other contingency beyond our control.

**** Due to the wide variance in installation practices and other conditions beyond our control, except as stated above, we do not guaranty or in any way warrant the installation of Chimney products.**

CLAIM PROCEDURE:

If you believe that a product is defective, notify us in writing at the following location:

SELKIRK CANADA CORPORATION
P.O. Box 526, Depot 1
Hamilton, Ontario, CANADA, L8L 7X6
ATTN: WARRANTY CLAIMS DEPARTMENT


Notification should include a description of the product, model and serial number (if applicable) and a description of the product defect. Upon receipt of a written claim under this limited warranty and evidence of the date of purchase or installation, at our option and in our sole discretion, we will provide replacement product with similar or like quality of available product excluding any installation costs. We reserve the right to inspect or investigate any warranty claims prior to determining whether to provide replacement product. If, as determined by us that repair or replacement of the product is not commercially practicable or cannot be completed in a timely manner, we may refund the prorated purchase price paid for the product upon verification by providing a copy of your invoice or receipt of bill of sale.

Typical Installations


Sentinel
LIMITED
LIFETIME
WARRANTY

DECORATOR CEILING SUPPORT INSTALLATIONS


One Storey

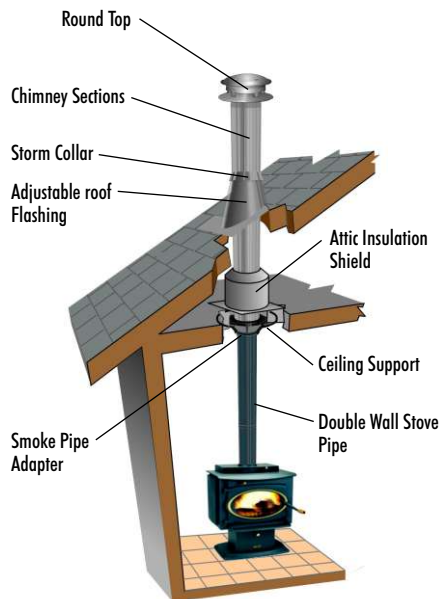

Two Storey

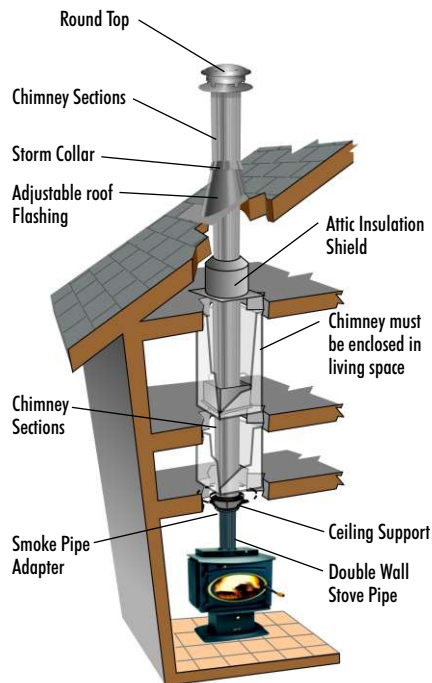


Elbow Installation

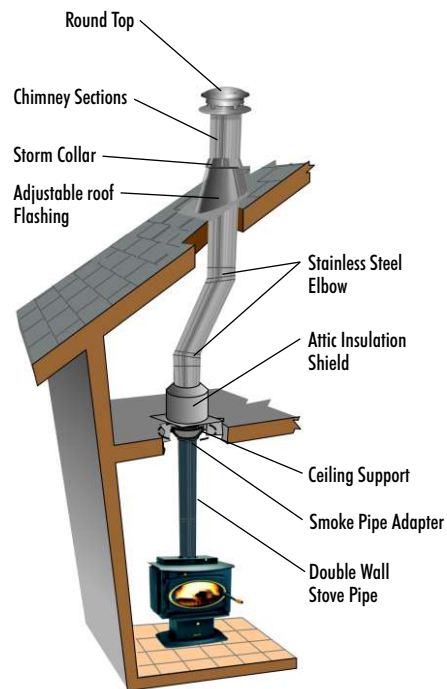


WALL SUPPORT INSTALLATIONS


One Storey

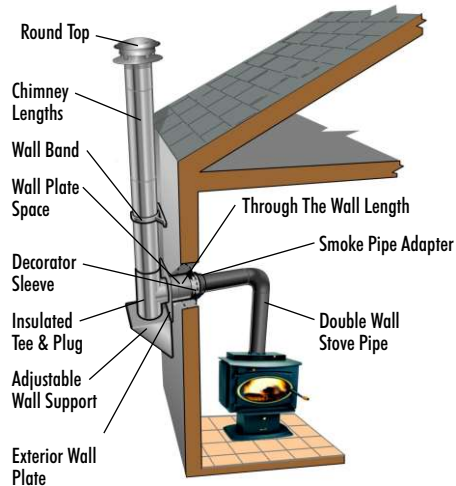

Through a soffit

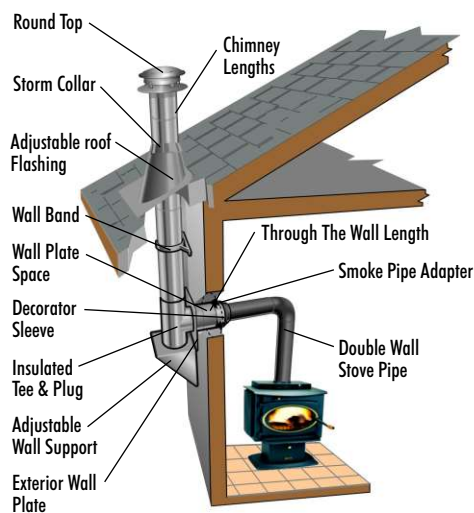

With Cathedral Ceiling Support Box

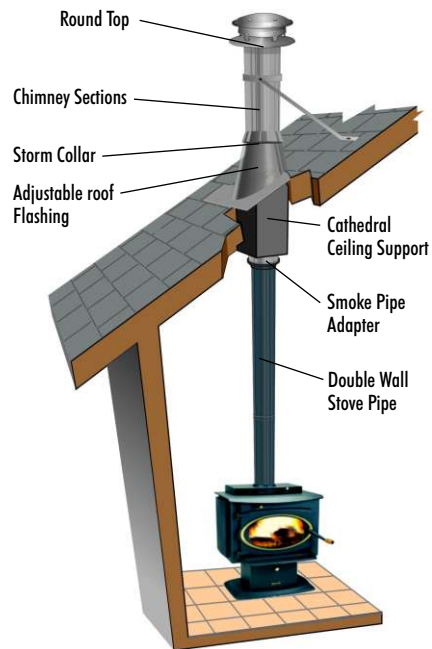

NOTE: Wall Support Kit includes Insulated Wall Thimble

www.selkirkcorp.com

SELKIRK
CANADA CORPORATION

P.O. Box 526, Depot 1
Hamilton, ON L8L 7X6
Toll Free: 1.888.SELKIRK (735.5475)

Info@selkirkcanada.com

CF003-E R&B 3522/4691 - 04/14 Rev 6